

Link zum Produkt: <https://erbetec.de/rollenkette-34-typ-a-12a1-60-1-p-193.html>



## Rollenkette 3/4" Typ A, 12A1, 60-1

|             |                   |
|-------------|-------------------|
| Bruttopreis | <b>14.71 Euro</b> |
|-------------|-------------------|

|            |                   |
|------------|-------------------|
| Nettopreis | <b>11.96 Euro</b> |
|------------|-------------------|

|               |                  |
|---------------|------------------|
| Verfügbarkeit | <b>Verfügbar</b> |
|---------------|------------------|

|            |               |
|------------|---------------|
| Lieferzeit | <b>Sofort</b> |
|------------|---------------|

|               |              |
|---------------|--------------|
| Katalognummer | <b>L12A1</b> |
|---------------|--------------|


|                      |                   |
|----------------------|-------------------|
| Code des Herstellers | <b>L12A1 60-1</b> |
|----------------------|-------------------|

|            |                |
|------------|----------------|
| Hersteller | <b>DONGHUA</b> |
|------------|----------------|

### Produktbeschreibung



**Rollenkette 3/4" Typ A, 12A1, 60-1**

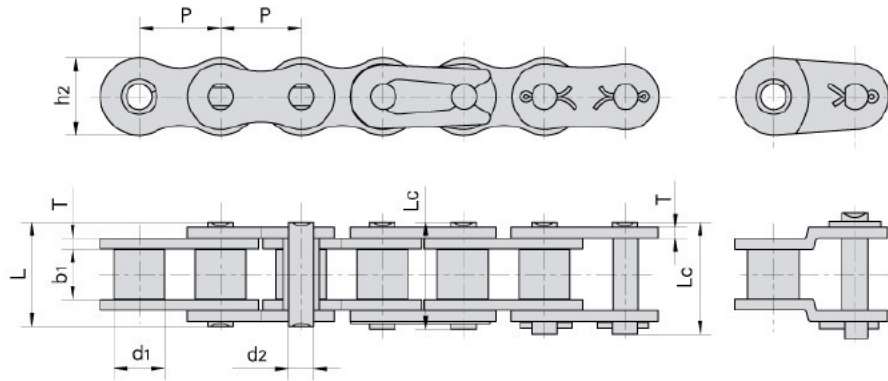

| DIN/ISO<br>Chain No.          | ANSI<br>Chain No.          | Pitch                                | Roller<br>diameter | Width<br>between<br>inner plates | Pin<br>diameter                      | Pin<br>length            |           | Inner<br>plate<br>depth             | Plate<br>thickness        | Ultimate<br>tensile<br>strength | Average<br>tensile<br>strength   | Weight<br>per<br>meter |
|-------------------------------|----------------------------|--------------------------------------|--------------------|----------------------------------|--------------------------------------|--------------------------|-----------|-------------------------------------|---------------------------|---------------------------------|----------------------------------|------------------------|
| <i>Teilung</i>                |                            | <i>Rollen-<br/>durch-<br/>messer</i> |                    | <i>Innere<br/>Breite</i>         | <i>Bolzen-<br/>durch-<br/>messer</i> | <i>Bolzen-<br/>länge</i> |           | <i>Innen-<br/>laschen-<br/>höhe</i> | <i>Laschen-<br/>dicke</i> | <i>Min.<br/>Bruchkraft</i>      | <i>Durchschn.<br/>Bruchkraft</i> | <i>Gewicht</i>         |
| <i>DIN/ISO<br/>Ketten Nr.</i> | <i>ANSI<br/>Ketten Nr.</i> | P                                    | d1<br>max          | b1<br>min                        | d2<br>max                            | L<br>max                 | Lc<br>max | h2<br>max                           | T<br>max                  | Q<br>min                        | Q0                               | q                      |
|                               |                            | mm                                   | mm                 | mm                               | mm                                   | mm                       | mm        | mm                                  | mm                        | kN/LB                           | kN                               | kg/m                   |

|       |    |        |       |       |      |       |       |       |      |            |      |      |
|-------|----|--------|-------|-------|------|-------|-------|-------|------|------------|------|------|
| 12A-1 | 60 | 19.050 | 11.91 | 12.57 | 5.94 | 25.90 | 27.70 | 18.00 | 2.42 | 31.80/7227 | 41.5 | 1.50 |
|-------|----|--------|-------|-------|------|-------|-------|-------|------|------------|------|------|